

O/BACK

**WARRANTY REGISTRATION FORM**

To validate the 1 year warranty, please complete the details below. In addition we would like you to help us improve the products and service we provide to you by completing the questionnaire and return to the address below. Personal details are not made available to any other person or organisation and are sole property of the retailer whom the transaction was made and with Horn. You are only requested to fill in one sheet per purchase.

Horn Australia Pty Ltd  
 PO Box 223  
 Salisbury SA 5108

☐ Mr ☐ Mrs ☐ Miss ☐ Ms

Name: .....

Date: .....

Address: ..... State: .....

Postcode: .....

Email Address: .....

Phone: .....

Name of Retailer: ..... Suburb: .....

State: .....

Model: ..... Colour: ..... Serial

Number: .....

*We would appreciate your assistance by answering the following questionnaire.  
 Please tick the appropriate box where applicable.*

1. Which of the following characteristics do you associate with your sewing cabinet?
- ☐ A smart piece of furniture
  - ☐ A compact piece of furniture
  - ☐ A convenient place to keep all my sewing bits and pieces together
  - ☐ Very good value for money
  - ☐ Something that helps me be more creative
  - ☐ An indispensable piece of furniture
  - ☐ Something that makes it easy to sew
  - ☐ A cleverly designed storage unit
  - ☐ A good Quality product
  - ☐ Is available in colours to match my decor
  - ☐ Other (specify) .....

2. Which describes the main use of your cabinet?
- ☐ General sewing and tailoring
  - ☐ Dressmaking
  - ☐ Embroidery
  - ☐ Quilting
  - ☐ Craft activities
  - ☐ Other (specify) .....

3. On average, how often would you use your sewing, overlocker, embroidery or quilting machine?
- ☐ At least once a day
  - ☐ At least once a week

4. In which room do you do most of your sewing?
- ☐ Specific sewing room
  - ☐ Spare room
  - ☐ Rumpus or family room
  - ☐ Bedroom
  - ☐ Lounge room
  - ☐ Kitchen
  - ☐ Study or office
  - ☐ Dining room
  - ☐ Other (Specify) .....


5. Which of the following did you use to get information on sewing cabinets?
- ☐ Books you purchased or borrowed
  - ☐ Television
  - ☐ Newspapers
  - ☐ Catalogues
  - ☐ Magazines
  - ☐ The internet
  - ☐ Sewing club & association
  - ☐ Friends
  - ☐ Relatives
  - ☐ Relevant dealers
  - ☐ Craft centres

6. Which of the following do you agree with?
- ☐ When I have finished my work for the day I

- ☐ At least once a fortnight  
☐ At least once a month  
☐ At least once every 6 months  
☐ At least once every 12 months  
☐ Very rarely (*less than once every 12 months*)
7. In the last 12 months has the amount of time you spend sewing, overlocking, embroidering & quilting:  
☐ Increased  
☐ Decreased  
☐ Remained about the same
8. What did this product replace?  
☐ Dining Table  
☐ Kitchen Table  
☐ Common Desk  
☐ Other .....
9. Which of the following age categories are you in?  
☐ 18 - 25 years  
☐ 26 - 39 years  
☐ 40 - 49 years  
☐ 50 - 59 years  
☐ 60 - 69 years  
☐ 70 years or over
10. How would you describe your occupation?  
☐ Professional/executive  
☐ White collar  
☐ Self employed  
☐ Blue collar  
☐ Home duties  
☐ Student  
☐ Unemployed  
☐ Retired  
☐ Other (*specify*) .....
11. Did you make the decision to purchase?  
☐ Yes  
☐ No  
☐ Consulted – Partner/Children/Parent  
☐ Gift
12. Is this your first Horn purchase?  
☐ Yes  
☐ No
13. What brand of sewing machine do you have?  
☐ Bernina  
☐ Brother  
☐ Husqvarna  
☐ Janome  
☐ Pfaff  
☐ Singer  
☐ Toyota  
☐ Other (*specify*) .....
14. Do you have an overlocker?  
☐ Yes  
☐ No
15. Please include any other comments about the product?  
.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....

*Thank you for taking the time to complete this questionnaire. This information will help us improve our service to you in the future. We would be grateful if you could send it along with the completed Warranty Registration form to your nearest Horn Office address.*



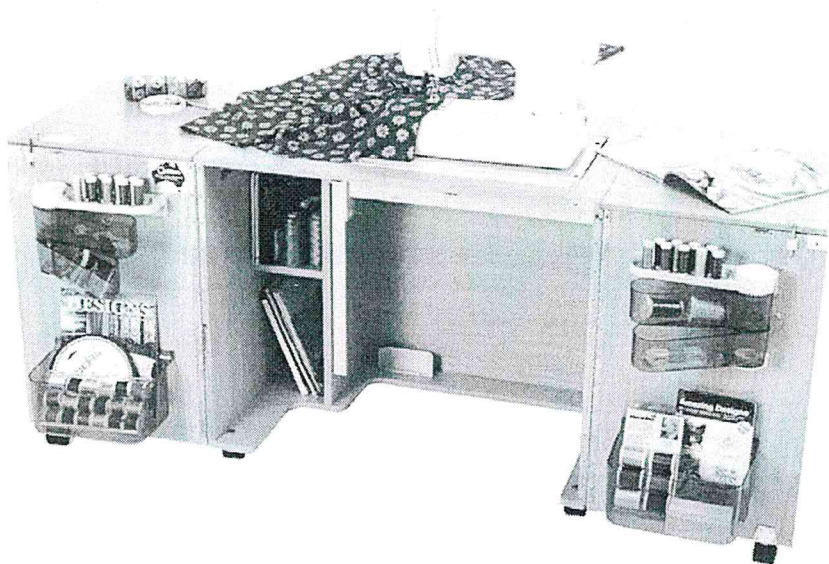

Accessories not included

### **Outback MKII Sewing Cabinet**

Congratulations on the purchase of your new Outback MKII Sewing Cabinet. Every effort has been taken to ensure your complete satisfaction with this custom designed product. For your convenience the Outback MKII Sewing Cabinet is supplied in three ready to assemble packs.

### **Helpful Assembly Hints**

Read the instructions carefully before starting. Check to see that all the parts are included. Work in a spacious area preferably on a carpet or soft surface. You will need a phillips head and flat head screw driver for the assembly. Cordless drill is preferable. Make sure you tighten all the screws securely and Tap dowels all the way in.

### **Warranty Information**

Horn Australia Pty Ltd warrants this Outback MKII Sewing Cabinet to be free from faulty parts or workmanship for a period of 12 months from the date of purchase. Under the terms of this warranty the repair and replacement of any parts shall be at the discretion of the company or their designated representatives. The warranty does not cover damaged caused by abuse, alteration, accident or neglect. The warranty does not cover damage caused as a result of moving the cabinet when loaded. Should service become necessary during the warranty period please contact your nearest Horn retailer. Product transportation is the owner's responsibility.

### **Outback MKII Sewing Cabinet Care**

Your Horn Outback MKII Sewing Cabinet normally requires a minimum amount of maintenance, however the following points are are worth noting:




















**Cleaning** - To remove marks and enhance the surface, wipe over with a general purpose cleaner.















**Caution** - Do not use ammonia based cleaning agents. Do not use harsh chemicals or abrasive cleaners. The surface can be wiped with a damp cloth but should be dried quickly.

**Horn Australia Pty Ltd**

Web: <http://www.horn.com.au> E-mail: [horn@horn.com.au](mailto:horn@horn.com.au)



## Outback MKII Assembly Instructions

COMPONENTS	DESCRIPTION	QTY
	Cam Bolt 24mm	8
	Cam Ø15mm	8
	Dowel Ø8 x 30mm	20
A 	Screw Ø3.4x15mm C/S	88
D 	Screw Ø3.5x18mm C/S	4
E 	Screw Ø3 x 25mm C/S	12
	Magnetic Catch	2
	Magnetic Catch Plate	2
	Castor Washer	4
	Locking Castor Ø50	5
	Castor Ø50	2
	Castor Bracket	3
	Castor Spanner	1
	Flap Hinge (Back)	3
	Butt Hinge	2
	Flush Hinge (52mm)	6
	Bow Handle + Screws	2
	Glue Bottle	2
	Short Flat Screwdriver (For tightening Cams)	1

COMPONENTS	DESCRIPTION	QTY
	Insert Holder	1
	Lifter Rail (Right)	1
	Lifter Rail (Left)	1
	Lifter (692mm)	1
	Swivel Tray Bracket	2
	Door Shelf (Left)	1
	Door Shelf (Right)	1
	Small Bucket (Tinted)	2
	Support Bracket	2
	Swivel Tray (Ass.)	2
	Cotton Reel Insert	2
	Gate Leg Button	1
	Ramp	2
	Equalizer	2
	Basket Insert	1
	Pin Cushion Foam	2
	Tape Measure 50cm	1


OUTBACK MKII SEWING CABINET PANELS AND THEIR DESCRIPTIONS

Note: Hole positions helps with panel orientation.

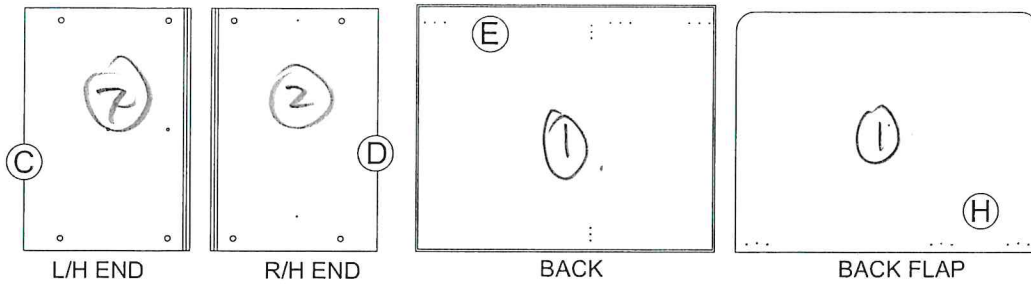


Before assembling panels place 2 to 3 drops of glue in dowel holes.

**Note:**  
Do not place glue in Cam or Cam Bolt holes.

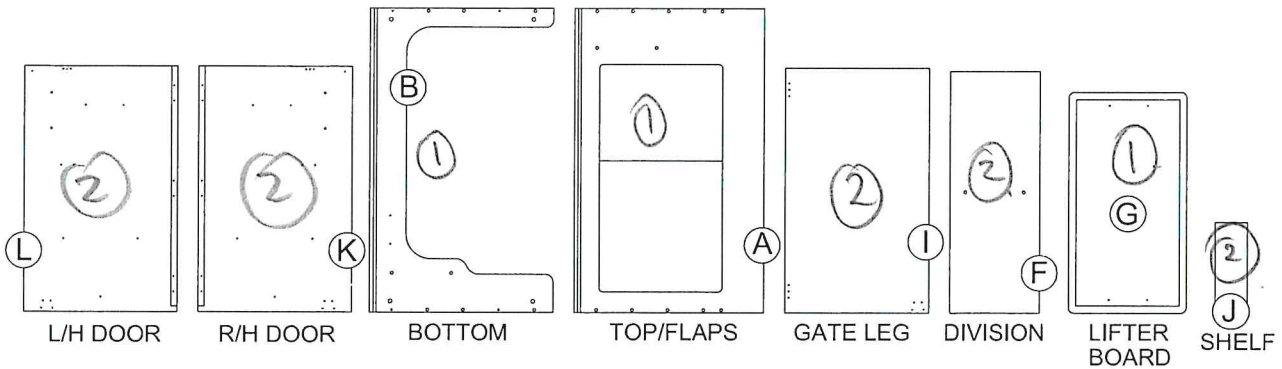

1. Top & Flap Pre-Assembly



Cam Bolt 24mm (x4)



Ramp



Magnetic Catch (x2)




Screw D Ø3.5x18mm (x2)



Screw A Ø3.4x15mm (x4)



**Assembly Steps**

1. Screw the Cam Bolts into the smaller holes in the Top panel as shown.
2. Fix the Ramp to the Top using Screw D Ø3.5x18mm  
**Note:** Check orientation
3. Fix the Magnetic Catches to the Top as shown using Screw A Ø3.4x15mm  
**Note:** Check orientation

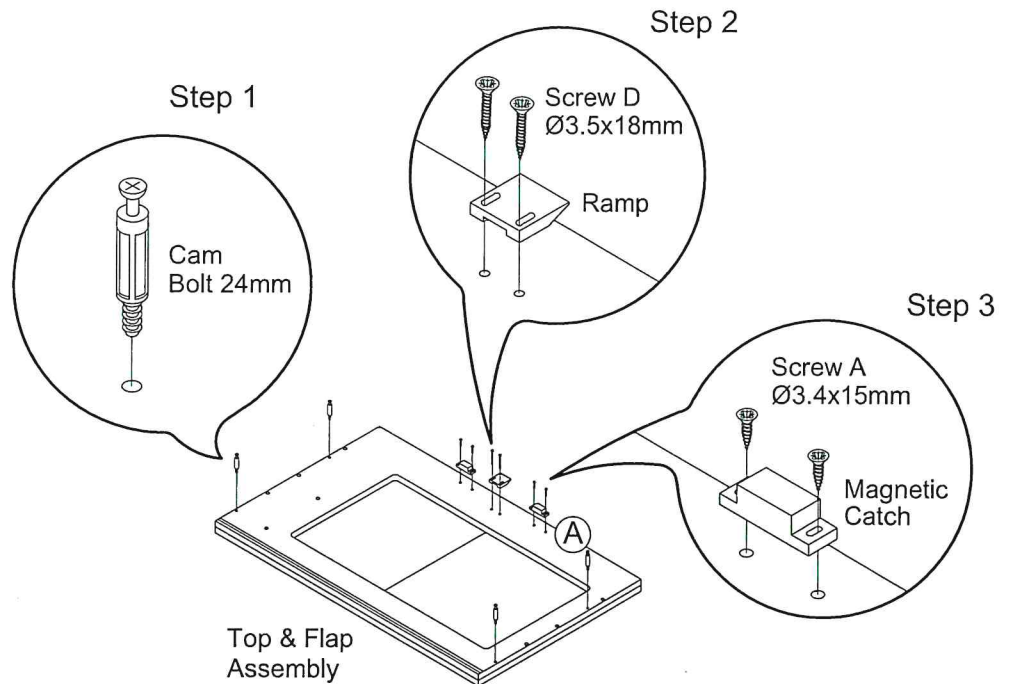




## 2. Bottom Pre-Assembly






Screw A Ø3.4x15mm (x2)

### Assembly Steps

1. Screw Cam Bolts into the Bottom as shown.
2. Locate and fix the Insert Holder to the Bottom using Screw A Ø3.4x15mm C/S

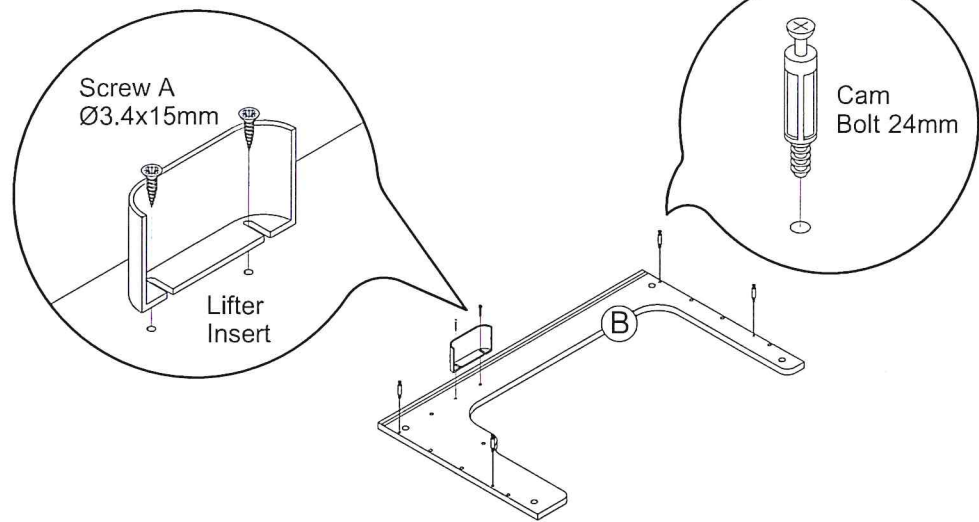


## 3. Left & Right Hand End Pre-Assembly



Note: Arrow on cam points towards closest edge.


STEP 1



L/H End


C

STEP 3

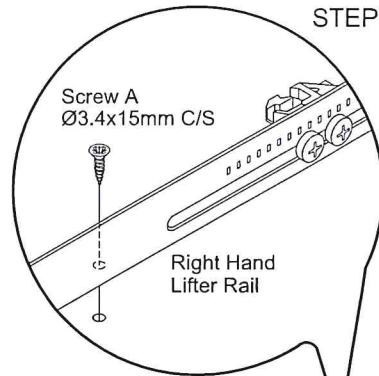

R/H End

STEP 2



### Assembly Steps

1. Press Cams into holes as shown.
  2. Insert Dowels with 2 to 3 drops of Glue
  3. Fit R/H Lifter Rail using Screw A Ø3.4x15mm C/S
- Note:** It should finish flush with the top edge of the End Panel,

## 4. Division / Shelf Pre-Assembly

Dowel Ø8 x 30mm (x8)

L/H Lifter Rail


Screw A Ø3.4 x 15mm (x3)

### Assembly Steps


1. Place 2 to 3 drops of Glue into each dowel hole in the Division and insert Dowels.
2. Screw on L/H Lifter Rail using Screw A Ø3.4 x 15mm  
**Note:** Rail will be level with top edge.
3. Place 2 to 3 drops of Glue into each dowel hole in the Shelf and insert Dowels.

STEP 2.

Screw A  
Ø3.4x15mm

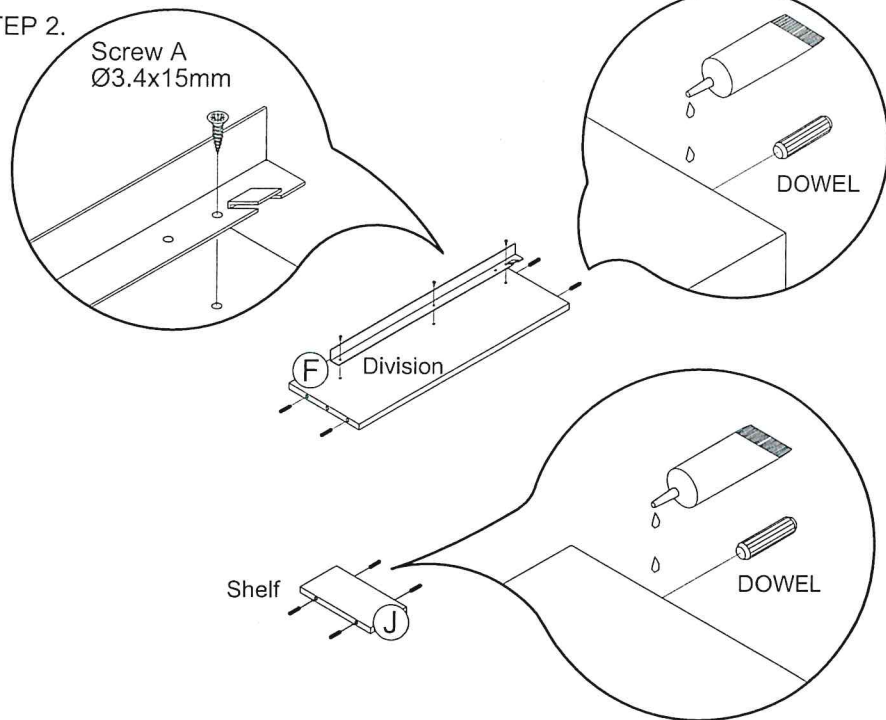

## 5. Bottom, Back, R/H End Assembly

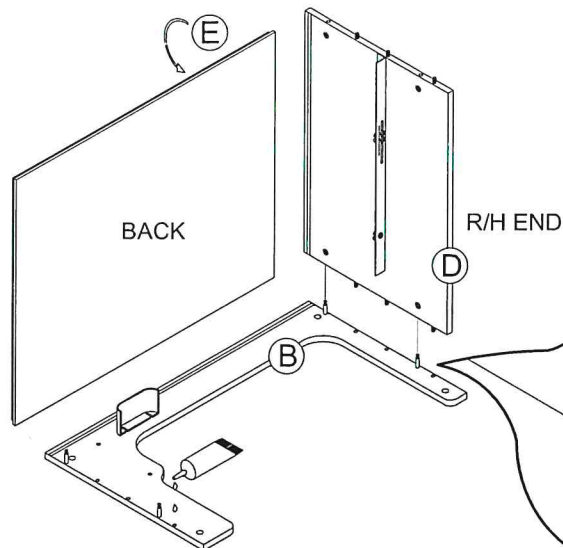

A. Insert  
Cam Bolt

B. Half turn  
Clockwise  
to Tighten.


### Assembly Steps

1. Place 2 to 3 drops of Glue in Dowel holes in the Bottom.
2. Insert the Cam Bolts into the R/H End and secure.
3. Slide the Back into the groove in the Bottom & R/H End.

## 6. Division / Shelf Pre-Assembly


### Assembly Steps

1. Place 2 to 3 drops of Glue into each dowel hole in the Division and insert the Shelf.
2. Place 2 to 3 drops of Glue into each dowel hole in the L/H End and insert the Shelf/Division assembly into the L/H End.
3. Place 2 to 3 drops of Glue into the dowel holes in the Bottom.
4. Position the Cam holes in the L/H End assembly over the Cam Bolts in the Bottom and insert. Secure by turning the Cams a half turn clockwise.

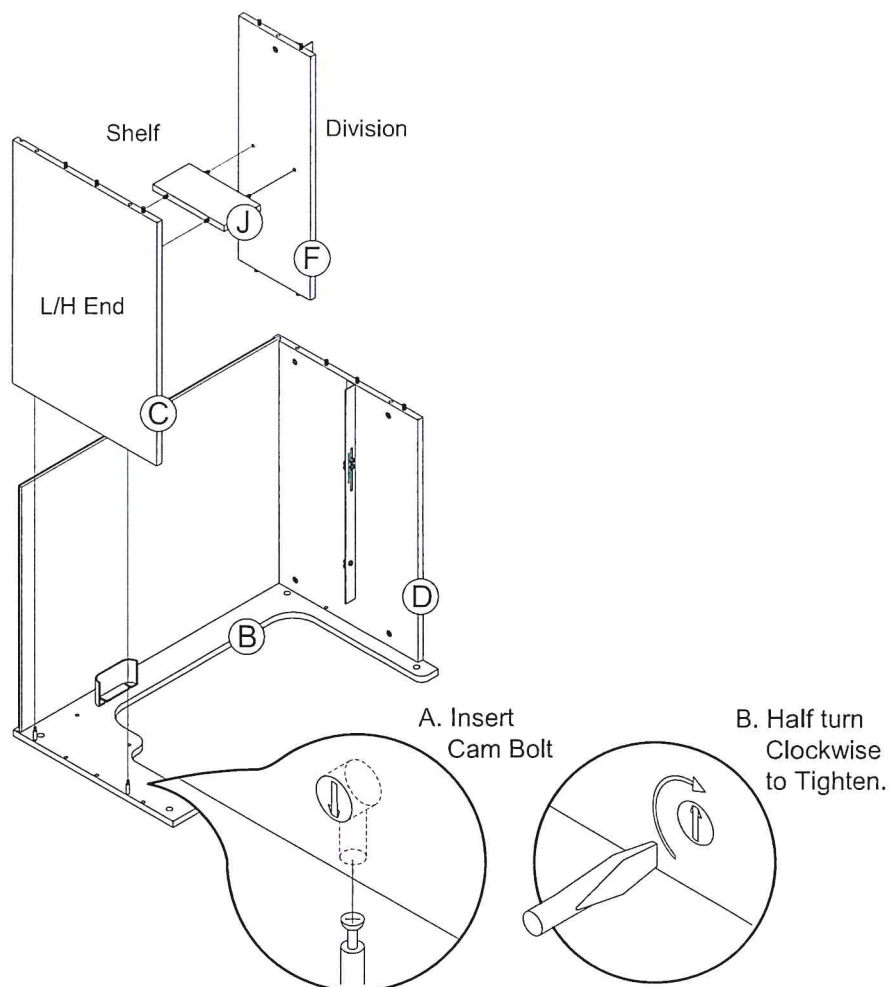

## 7. Lifter, Lifter Board Pre-Assembly

**Note:** Lifter orientation on the Lifter Board




### Assembly Steps

1. Screw the Lifter to the Lifter Board using Screw A Ø3.4 x 15mm C/S

### Note:


The Lifter orientation on Lifter Board

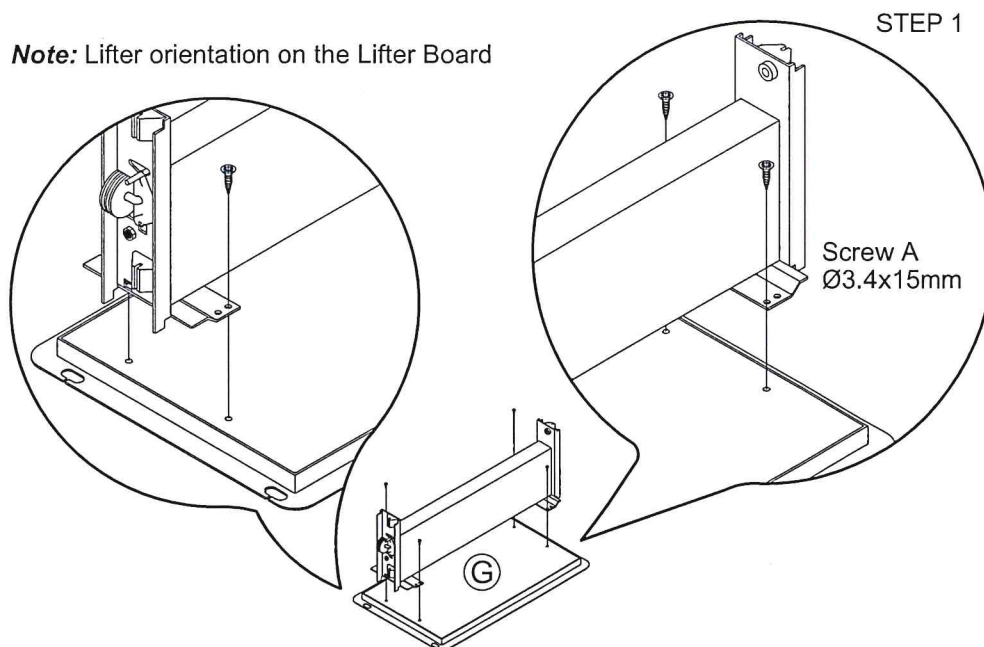



## 8. Lifter Assembly into Cabinet

Step 1.




Lifter Board Assembly

### Assembly Steps


1. Position Lifter guides over Rails and gently slide the Lifter into position.

### Note:

Ensure all 4 plastic guides (2 on each side are positioned correctly.)

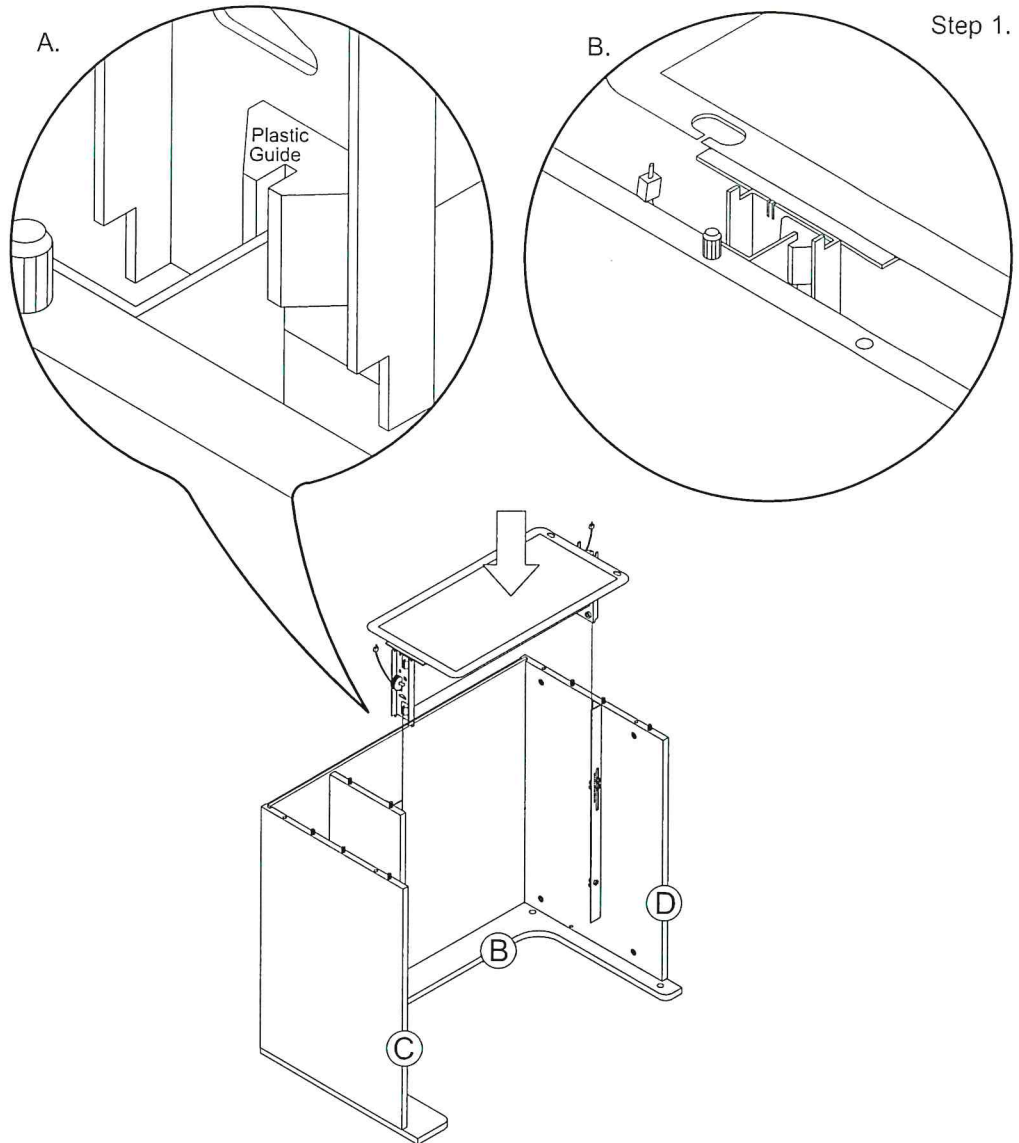

## 9. Lifter Cable Attachment




### Assembly Steps

1. Loop Cable through Metal Tab on Lifter Rails & secure.
2. Push Lifter down and click into first stop position.

### Note:

When the Lifter is clicked into this first stop position a small block of timber will disengage from the rear of the Lifter.

Discard block

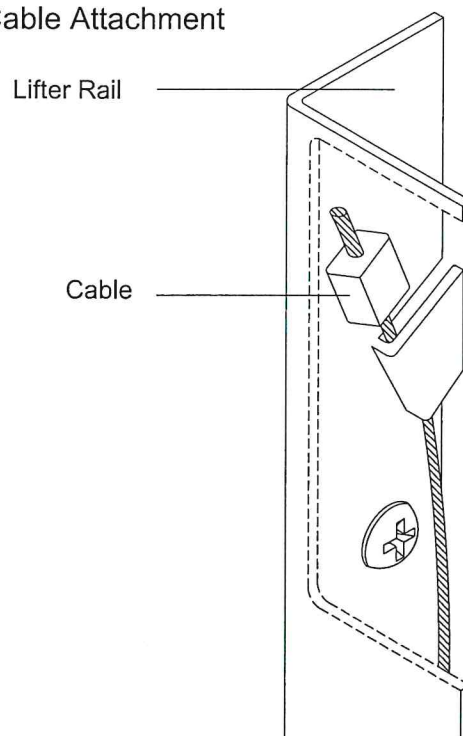


## 10. Top Assembly


### Assembly Steps

1. Place 2 to 3 drops of glue in the Dowel holes in the Top Assembly
2. Align the Top Assembly Cam Bolts with the Ends and Division and insert.
3. Half turn the Cams Clockwise to tighten
4. Once complete roll the cabinet onto its Top.


**Note:** It may require 2 people to lift the cabinet.

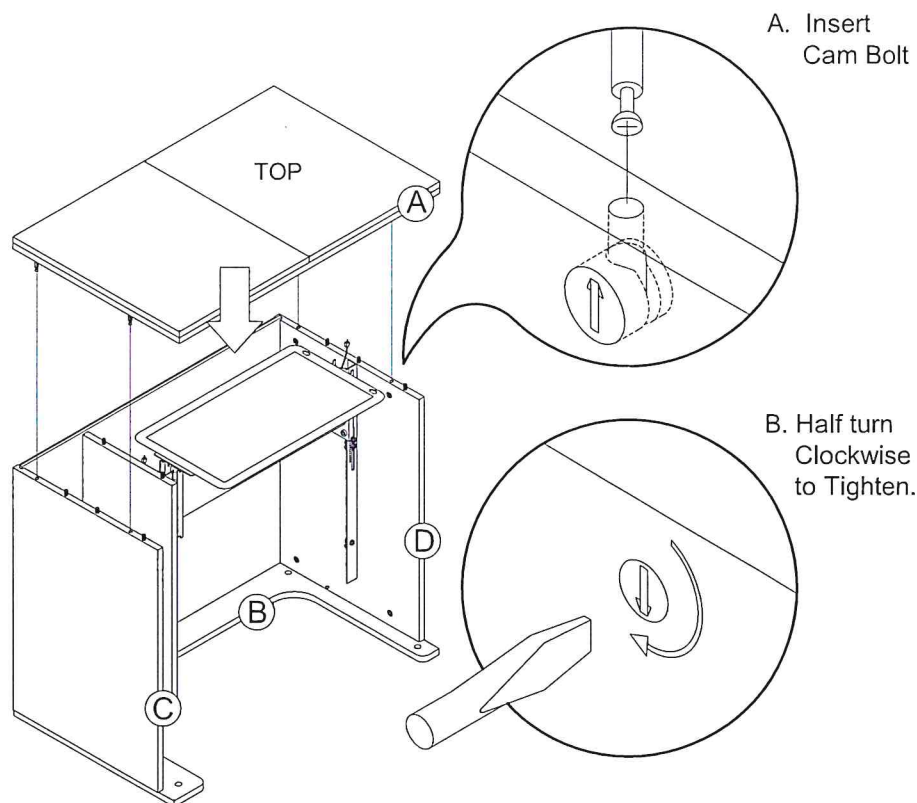

## 11. Back Flap Pre-assembly



Flap Hinge (x3)



Ramp




Screw D Ø3.5 x 18mm (x2)



Screw A Ø3.4 x 15mm (x9)

### Assembly Steps

1. Screw on Flap Hinge using Screw A Ø3.4 x 15mm C/S
2. Screw on Ramp using Screw D Ø3.5 x 18mm C/S

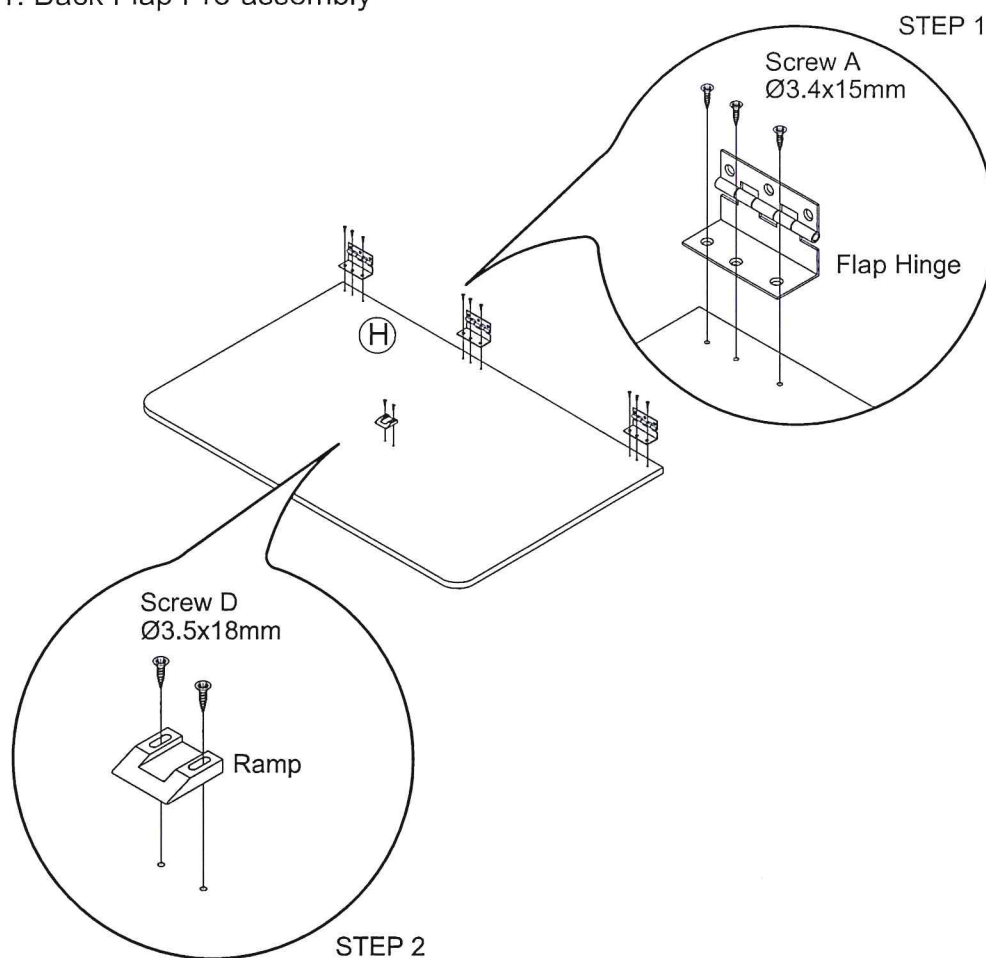


## 12. Fitting the Back Flap



Screw A Ø3.4x15mm (x9)

### Assembly Steps

1. Fix the Back Flap to the Cabinet using Screw A Ø3.4x14mm C/S

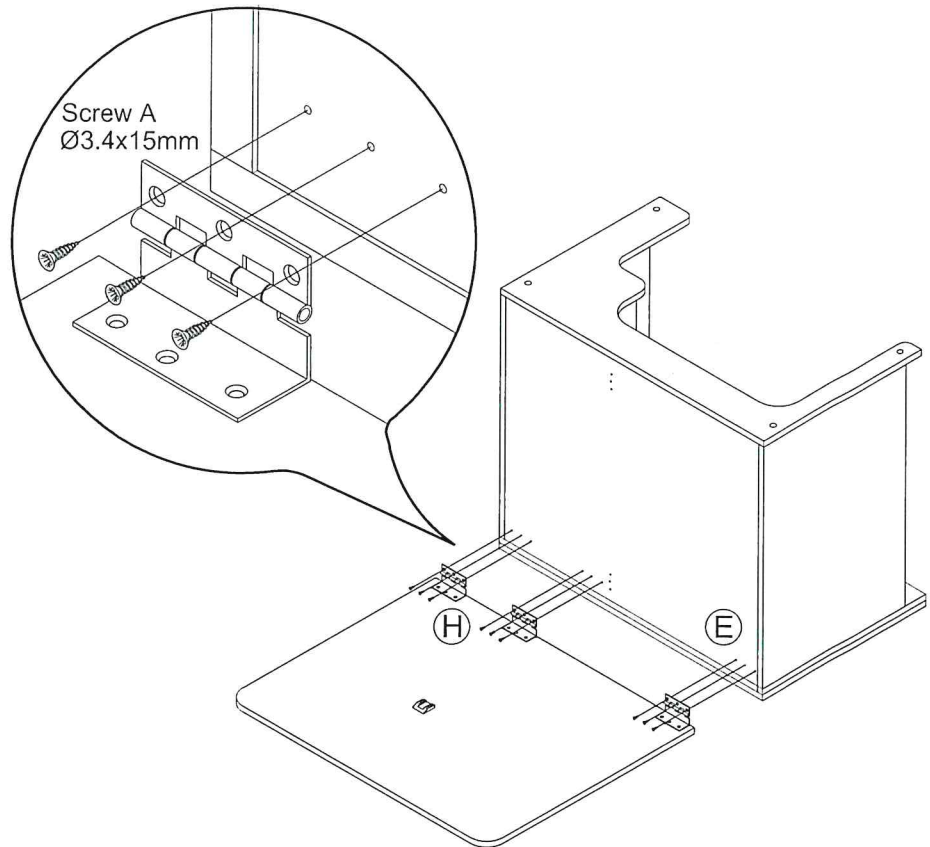

## 13. Gate Leg Pre-assembly



Gate Leg Button



Butt Hinge (x2)



Castor Bracket




Castor Ø50mm locking castor



Screw A Ø3.4 x 15mm (x10)

### Assembly Steps

1. Tap in Gate Leg Button
2. Screw on Butt Hinge using Screw A Ø3.4 x 15mm
3. Screw on Castor Bracket using Screw A Ø3.4 x 15mm
4. Screw on Castor and secure.

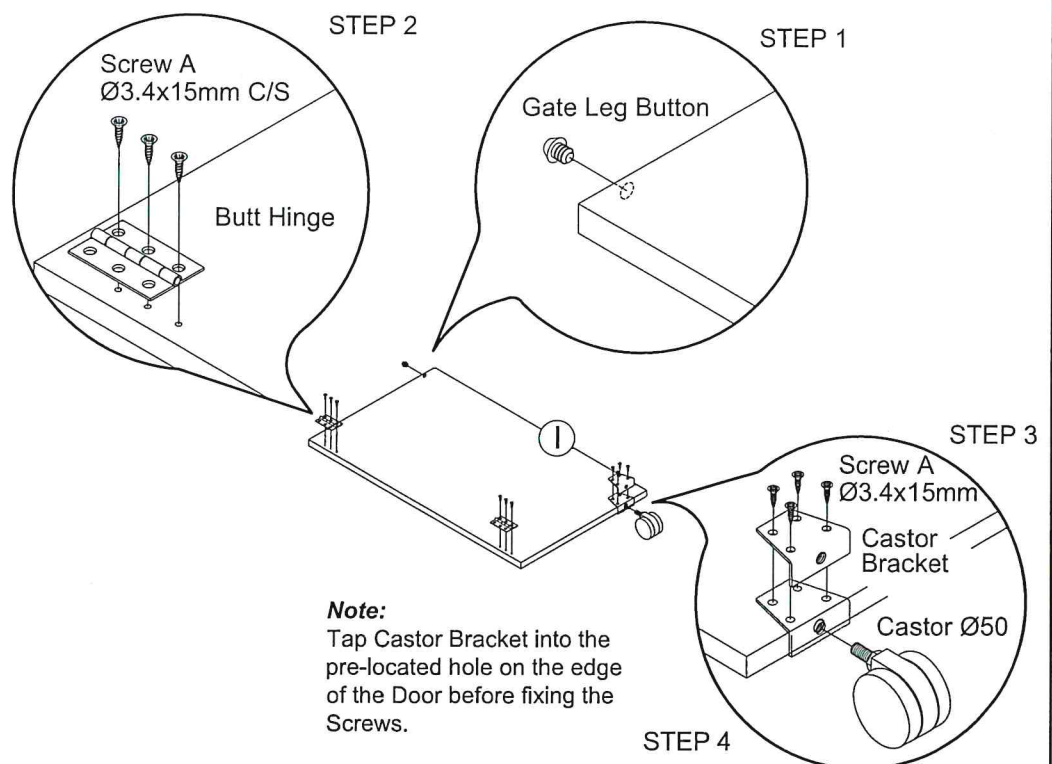




## 14. Gate Leg Assembly

### STEP 1.


 Screw A Ø3.4x15mm (x6)

#### Assembly Steps


1. Fix Gate Leg to the back of Cabinet using Screw A Ø3.4x15mm C/S
2. Swing Gate Leg against Back.

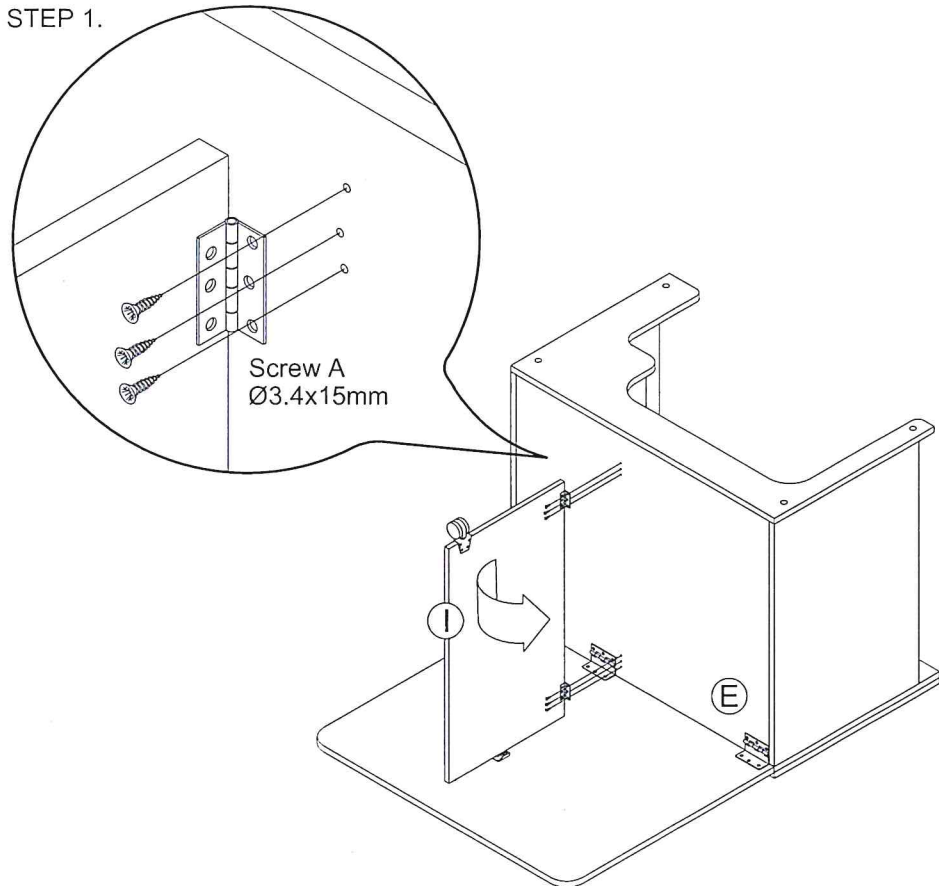

## 15. Castor Attachment


 Castor Ø50mm (x2) 2 x Locking

 Washer (x4)

 Spanner

#### Assembly Steps

1. Place Castor Washers over Castor thread and screw into Bottom and secure using the Spanner. Put the locking castors on the front of the cabinet
2. Carefully roll the cabinet upright. This will require 2 people to perform safely.

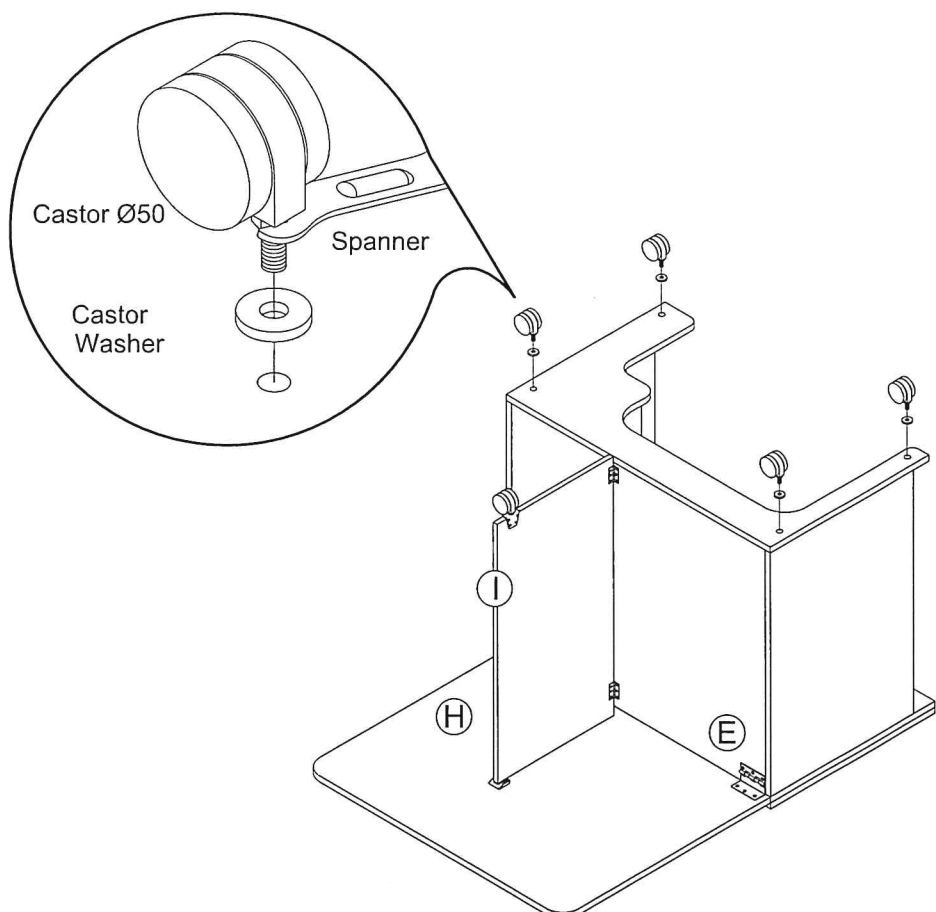

## 16. L/H & R/H Door Pre-Assembly




Locking Castor Ø50mm (x2)



Flush Hinge (x6)



Castor Bracket (x2)



Equalizer (x2)




Magnetic Catch Plate (x2)






Screw A Ø3.4x15mm (x24)

### Assembly Steps


1. Screw on Flush Hinge using Screw A Ø3.4x15mm C/S
2. Screw on Castor Bracket use Screw A Ø3.4x15mm C/S
3. Screw on Locking Castor
4. Screw on Equalizer using Screw A Ø3.4x15mm C/S
5. Screw on Magnetic Catch Plate using Screw A Ø3.4x15mm C/S
6. Repeat for L/H Door

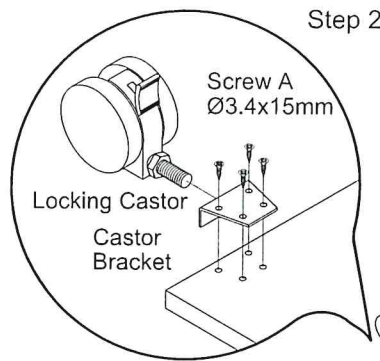


**Note:**  
Tap Castor Bracket into the hole in the edge of the Door before inserting screws.

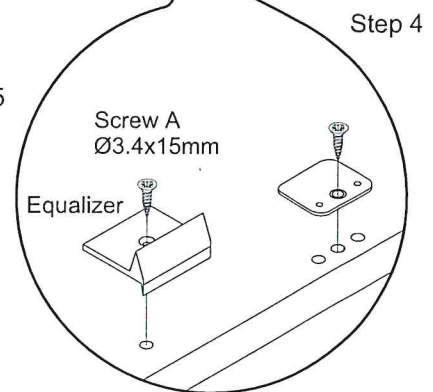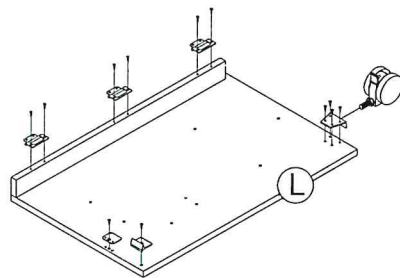

## 17. Door Shelf Assembly



L/H Door Shelf





R/H Door Shelf




Screw E Ø3 x 25mm (x4)

### Assembly Steps

1. Locate L/H Door Shelf on the L/H Door & secure use Screw E Ø3x25mm C/S
2. Repeat for R/H Door Shelf

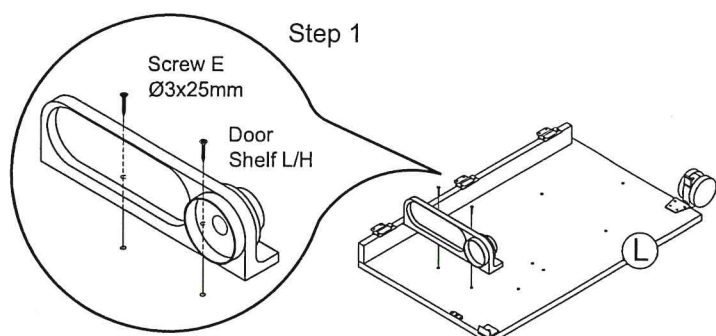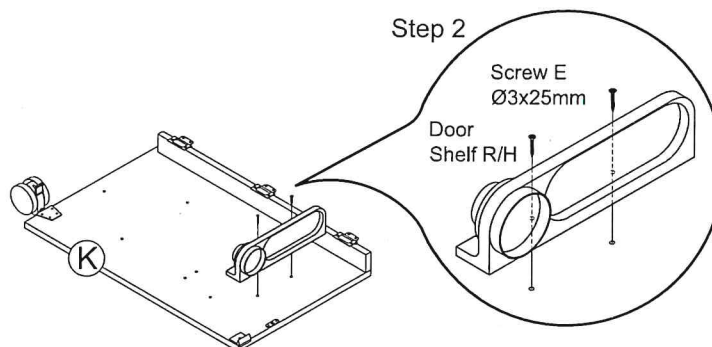


## 18. R/H Door Assembly

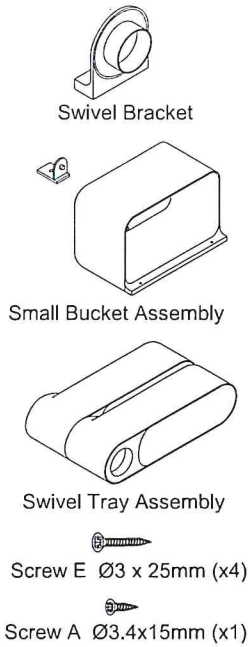


### Assembly Steps

1. Fit Swivel Tray Assembly.
2. Fit the Swivel Bracket into the base of the Swivel Tray assembly and secure using Screw E Ø3x25mm C/S.
3. Position the Support Bracket and secure using Screw A Ø3.4x15mm.
4. Locate and fit the Small Bucket onto the Support Bracket and secure use Screw E Ø3x25mm

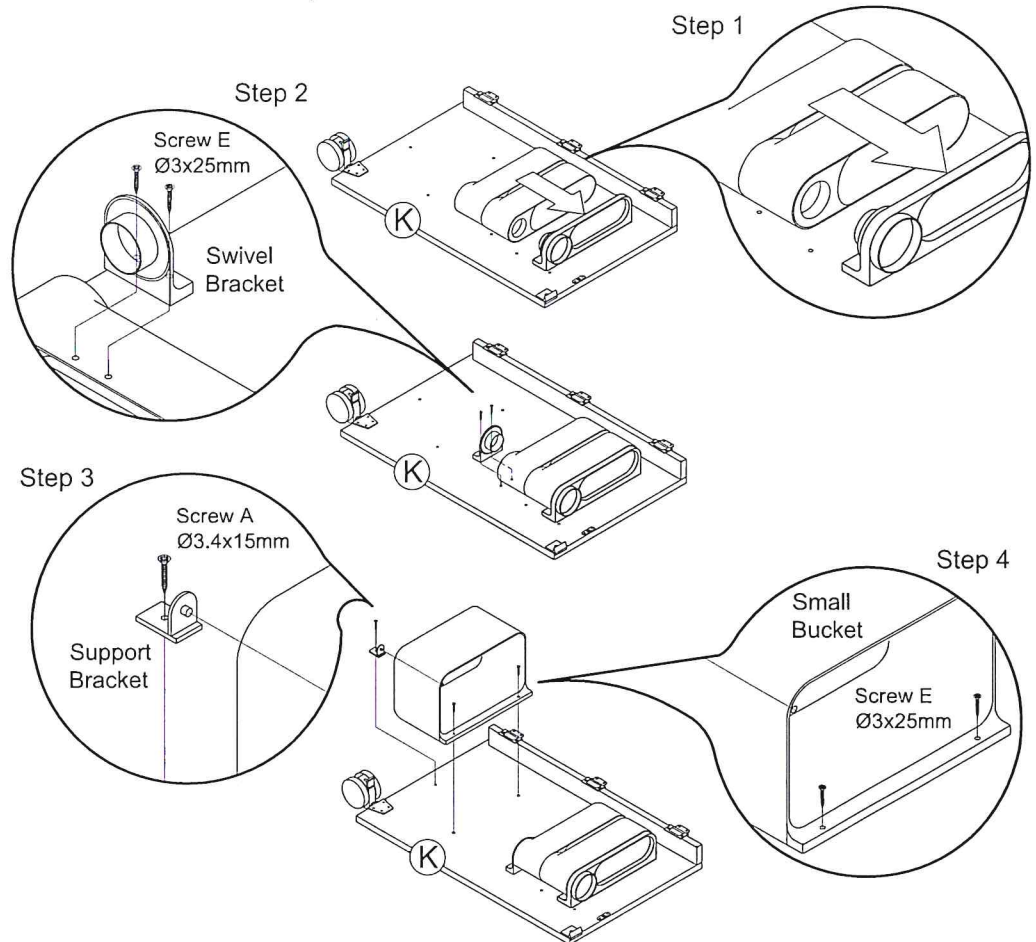


## 19. L/H Door Assembly

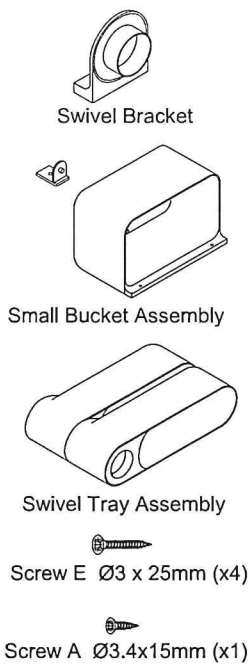

### Assembly Steps

1. Fit Swivel Tray Assembly.
2. Fit the Swivel Bracket into the base of the Swivel Tray assembly and secure using Screw E Ø3x25mm C/S.
3. Position the Support Bracket and secure using Screw A Ø3.4x15mm.
4. Locate and fit the Small Bucket onto the Support Bracket and secure use Screw E Ø3x25mm

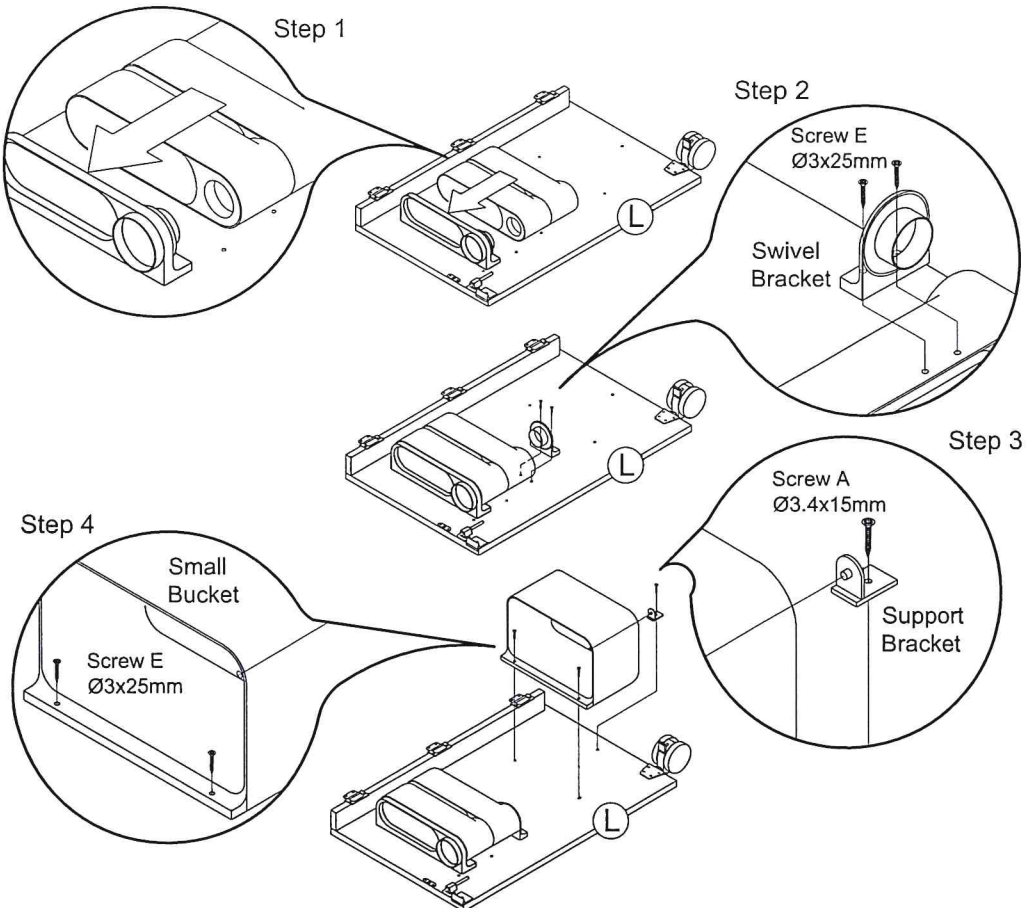



## 20. Fitting Doors & Handles



Bow Handle (x2)



Handle Screw (x4)



Screw A Ø3.4x15mm (x12)


### Assembly Steps

1. Fit Small & Large Doors to Cabinet Ends using Screw A Ø3.4x15mm


### Note:

Fit Screws into pre-drilled holes and secure

2. Fit Bow Handles using Handle Screws supplied

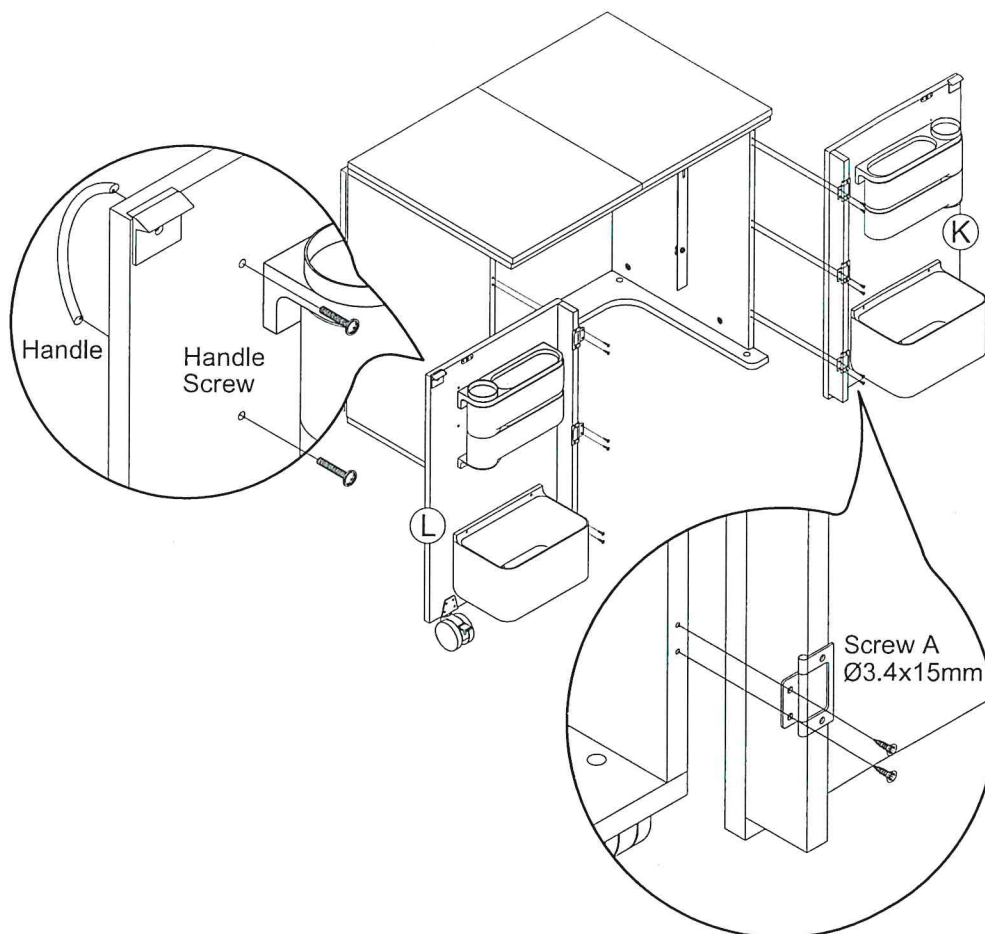

## 21. Securing Flaps

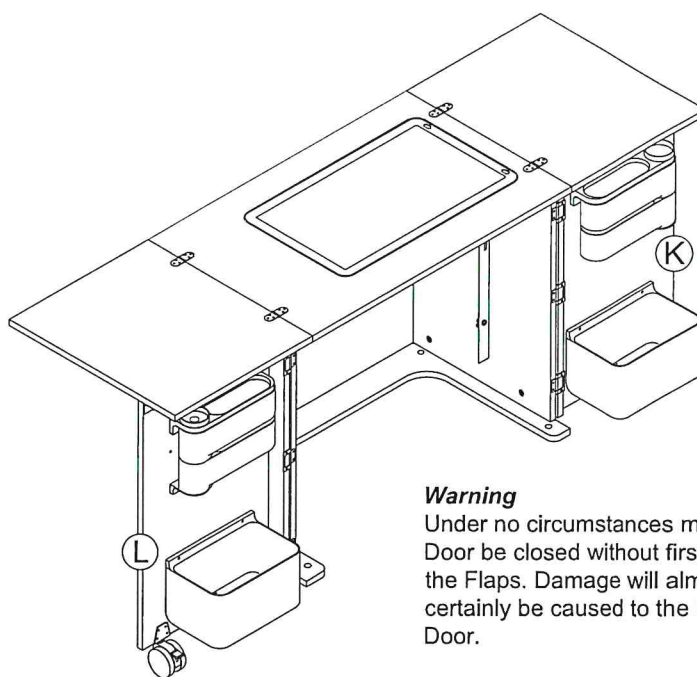

### Assembly Steps

1. Open Doors and swing Flaps onto top of Doors.
2. Lock Castors in position. This will secure the Doors

### Note:

Doors must be open and in place before Flaps are opened and positioned on Doors

### Warning

Under no circumstances must the Door be closed without first closing the Flaps. Damage will almost certainly be caused to the Flap and Door.

